
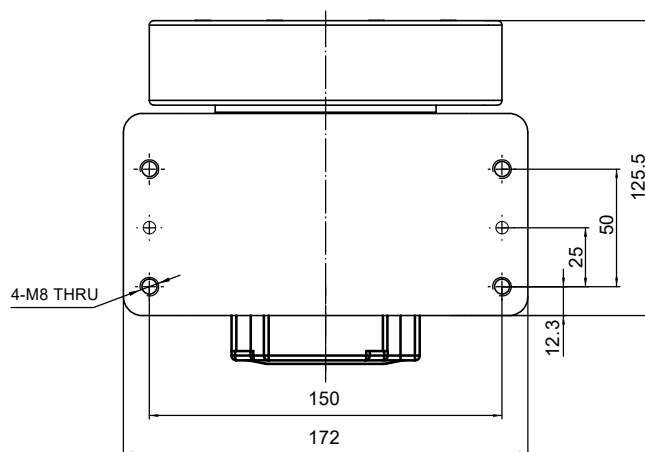
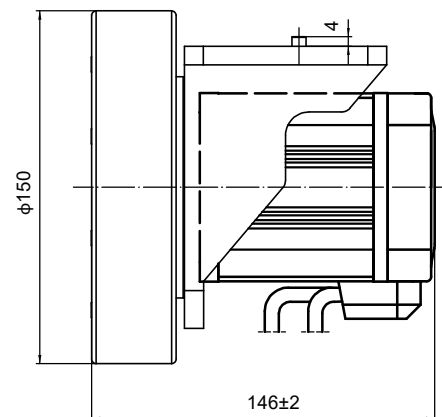


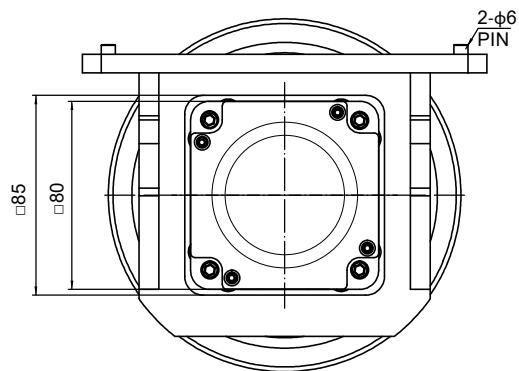

Motor Specifications (Tested in MBDV drive)

1	Basic DC Bus Voltage	V (DC)	48
2	Rated Output Power	Watts	400
3	Rated Speed	rpm	2000
4	Max. Mechanical Speed	rpm	2900
5	Rated Torque	Nm	1.91
6	Peak Torque	Nm	4.78
7	Rated Current	A (rms)	11.4
8	Peak Current	A (rms)	27.8
9	IP Rating		IP54

Gear Specification

Ratio	10	Shaft Load-Radial	5800N
Full Load Efficiency	97%	Back Lash	15arcmin
L10 Life	20000h	Noise	60db

允许的公差值范围


小数: MM

X.XXX=±0.01

X.XX =±0.10

X.X =±0.20

视图



版本	标记	数量	更改单号	日期
设计			工艺	
标准化			审核	
校核			批准	
市场部			日期	

MSD150-10-040-20GSL-N

出图阶段	质量	比例
D		1:2
第1页	共1页	

上海安浦鸣志自动化设备有限公司

首次使用机型

A50002

个/台

1/1