
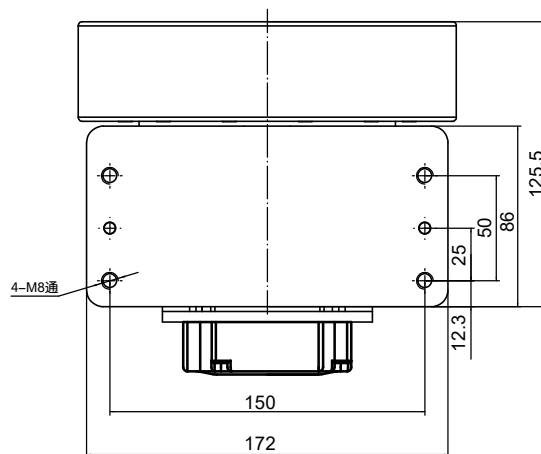
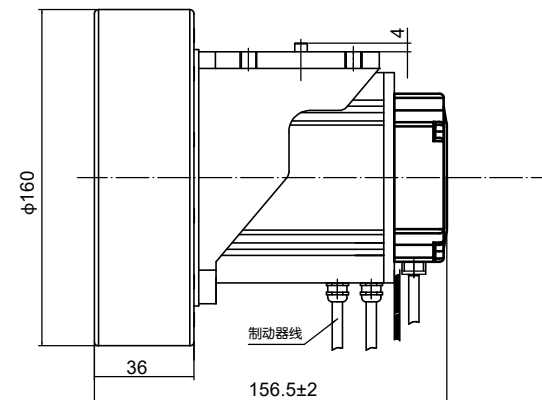


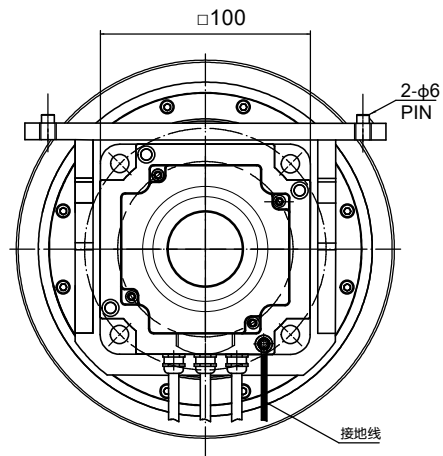

#### Motor Specifications (Tested in MBDV drive)

|   |                       |         |      |
|---|-----------------------|---------|------|
| 1 | Basic DC Bus Voltage  | V (DC)  | 48   |
| 2 | Rated Output Power    | Watts   | 750  |
| 3 | Rated Speed           | rpm     | 2000 |
| 4 | Max. Mechanical Speed | rpm     | 2300 |
| 5 | Rated Torque          | Nm      | 3.6  |
| 6 | Peak Torque           | Nm      | 7.2  |
| 7 | Rated Current         | A (rms) | 16.1 |
| 8 | Peak Current          | A (rms) | 32.7 |
| 9 | IP Rating             |         | IP54 |

#### Gear Specification

|                      |        |                   |          |
|----------------------|--------|-------------------|----------|
| Ratio                | 10     | Shaft Load-Radial | 4550N    |
| Full Load Efficiency | 97%    | Back Lash         | 15arcmin |
| L10 Life             | 20000h | Noise             | 60db     |

允许的公差值范围

小数: MM

X.XXX=±0.01

X.XX=±0.10

X.X=±0.20

视图



版本

标记

数量

更改单号

日期

设计

标准化

校核

工艺

审核

批准

日期

日期

日期

MSD160-10-075-20GSL-B

出图阶段

质量

比例

D

1:2

第1张

共1张

上海安浦鸣志自动化设备有限公司

首次使用机型

A50002

个/台

1/1