
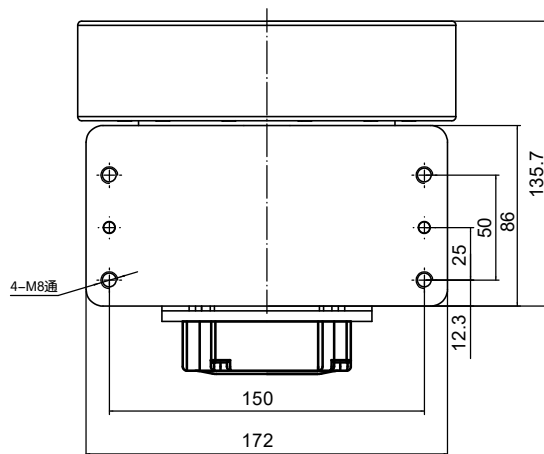
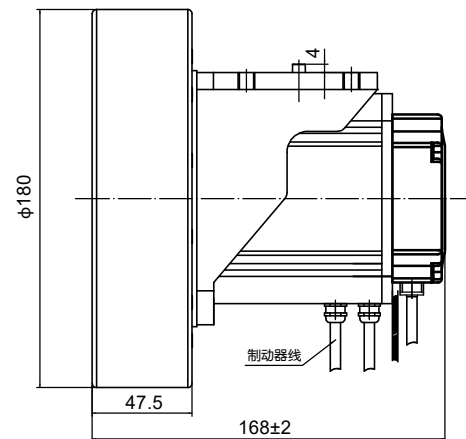


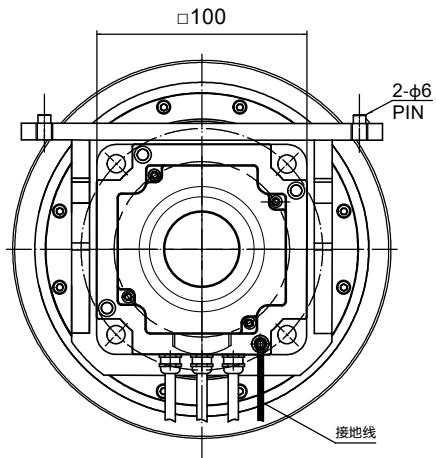

Motor Specifications (Tested in MBDV drive)

1	Basic DC Bus Voltage	V (DC)	48
2	Rated Output Power	Watts	750
3	Rated Speed	rpm	2000
4	Max. Mechanical Speed	rpm	2300
5	Rated Torque	Nm	3.6
6	Peak Torque	Nm	7.2
7	Rated Current	A (rms)	16.1
8	Peak Current	A (rms)	32.7
9	IP Rating		IP54

Gear Specification

Ratio	10	Shaft Load-Radial	6250N
Full Load Efficiency	94%	Back Lash	15arcmin
L10 Life	20000h	Noise	60db

允许的公差值范围							MSD180-10-075-20GSL-B					
小 数: MM												
X.XXX=±0.01		AO										
X.XX =±0.10		版本	标记	数量	更改单号		日期		出图阶段		质量	比例
X.X =±0.20			设计		工 艺				D			1:2
			标准化		审 核				第 1 张		共 张	
视 图		校 核			批 准				上海安浦鸣志自动化设备有限公司			
		市场部			日 期							

首次使用机型
A50002
个/台
1/1