
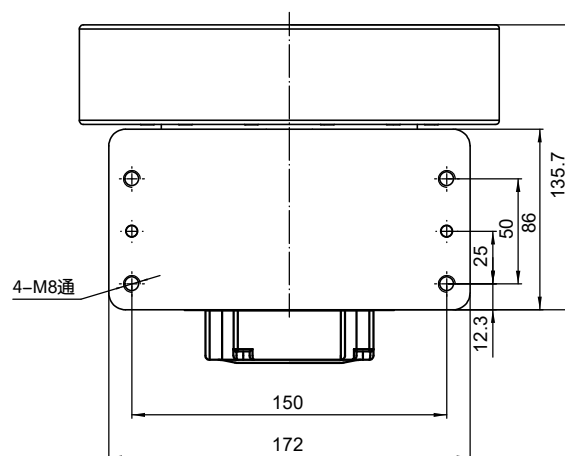
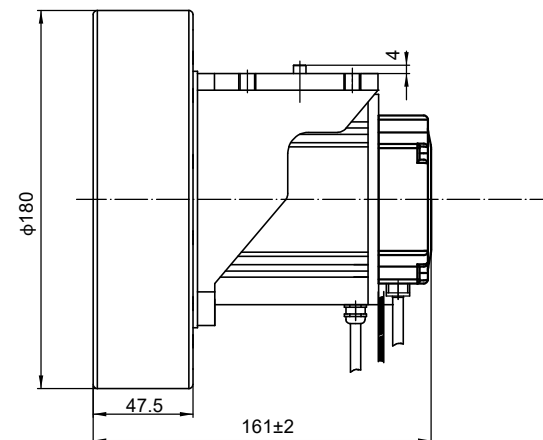


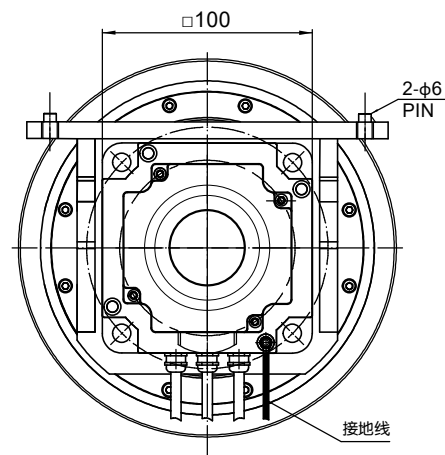

Motor Specifications (Tested in MBDV drive)

1	Basic DC Bus Voltage	V (DC)	48
2	Rated Output Power	Watts	1000
3	Rated Speed	rpm	2000
4	Max. Mechanical Speed	rpm	2500
5	Rated Torque	Nm	4.8
6	Peak Torque	Nm	7.2
7	Rated Current	A (rms)	24.2
8	Peak Current	A (rms)	35.1
9	IP Rating		IP54

Gear Specification

Ratio	10	Shaft Load-Radial	6250N
Full Load Efficiency	94%	Back Lash	15arcmin
L10 Life	20000h	Noise	60db

允许的公差值范围							MSD180-10-100-20GSL-N				
小 数: MM											
X.XXX=±0.01		AO									
X.XX =±0.10		版本	标记	数量	更改单号	日期			出图阶段	质量	比例
X.X =±0.20		设计				工艺			D		1:2
		标准化				审核			第 1 张		共 张
视 图		校 核				批准			上海安浦鸣志自动化设备有限公司		
		市场部				日期					