
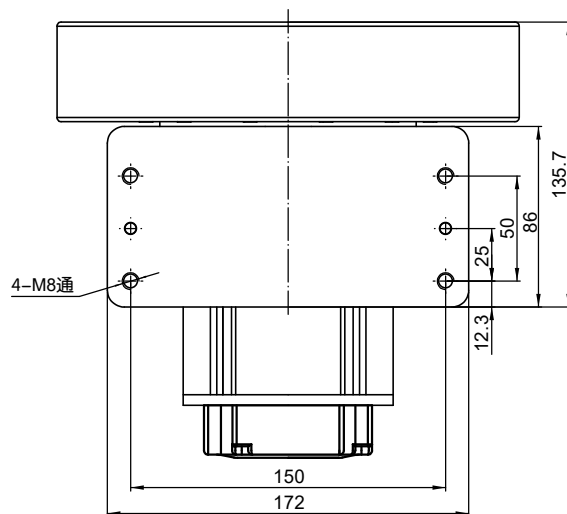
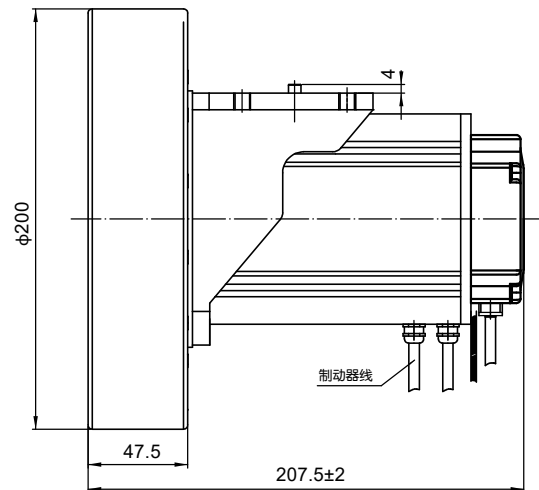


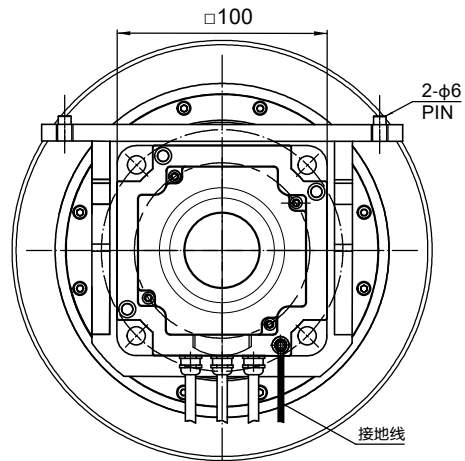

Motor Specifications (Tested in MBDV drive)

1	Basic DC Bus Voltage	V (DC)	48
2	Rated Output Power	Watts	1000
3	Rated Speed	rpm	2000
4	Max. Mechanical Speed	rpm	2500
5	Rated Torque	Nm	4.8
6	Peak Torque	Nm	7.2
7	Rated Current	A (rms)	24.2
8	Peak Current	A (rms)	35.1
9	IP Rating		IP54

Gear Specification

Ratio	10	Shaft Load-Radial	6250N
Full Load Efficiency	94%	Back Lash	15arcmin
L10 Life	20000h	Noise	60db

允许的公差值范围


小 数: MM

X.XXX=±0.01

X.XX =±0.10

X.X =±0.20

视图



版本

标记

数量

更改单号

日期

设计

标准化

校核

市场部

工艺

审核

批准

日期

MSD200-10-100-20GSL-B

出图阶段

质量

比例

D

1:2

第 1 张

共 1 张

上海安浦鸣志自动化设备有限公司

首次使用机型

A50002

个/台

1/1