
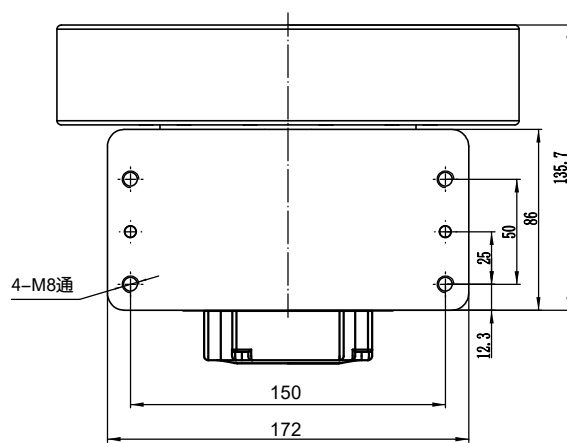
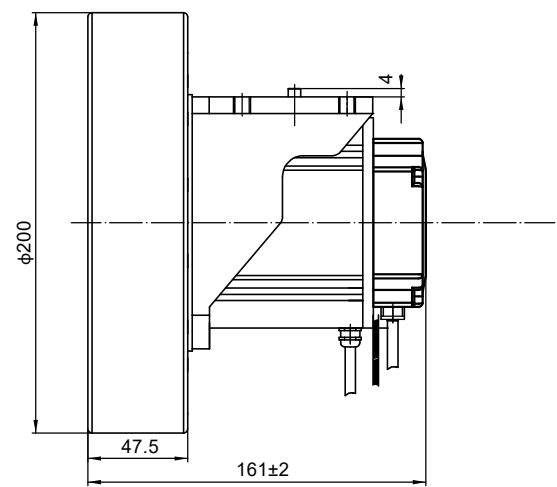


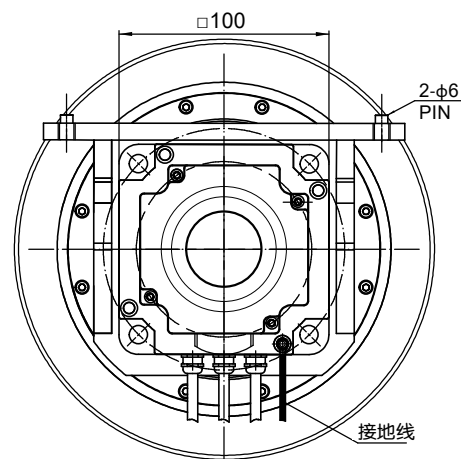

Motor Specifications (Tested in MBDV drive)

1	Basic DC Bus Voltage	V (DC)	48
2	Rated Output Power	Watts	1000
3	Rated Speed	rpm	2000
4	Max. Mechanical Speed	rpm	2500
5	Rated Torque	Nm	4.8
6	Peak Torque	Nm	7.2
7	Rated Current	A (rms)	24.2
8	Peak Current	A (rms)	35.1
9	IP Rating		IP54

Gear Specification

Ratio	10	Shaft Load-Radial	6250N
Full Load Efficiency	94%	Back Lash	15arcmin
L10 Life	20000h	Noise	60db

首次使用机型
AS0002
个/台
1/1

允许的公差值范围
小 数: MM
X.XXX=±0.01
X.XX =±0.10
X.X =±0.20

视图

版本	标记	数量	更改单号	日期
设计				
标准化				
审核				
批准				
市场部	☐			

MSD200-10-100-20GSL-N

出图阶段
D

质量

比例
1:2

第 1 张

共 1 张

上海安浦鸣志自动化设备有限公司